

50GU120N

主要参数 Main Characteristics

I _C	50A
V _{ces}	1200 V
V _{cesat-typ}	2.1V


用途

- 光伏逆变器
- UPS 电源
- 电焊机
- 中高频率逆变器

Applications

- Solar Converters
- Uninterrupted Power Supply
- Welding Converters
- Mid to High Range Switching


Frequency Converters



TO-264

产品特性

- 1200V, 50A
- $V_{CE(sat)(typ.)} = 2.1V @ V_{GE} = 15V, I_C = 50A$
- Maximum Junction Temperature 150°C
- Pb-free Lead Plating; RoHS Compliant



产品中有毒有害物质或元素的名称及含量

部件名称 含量要求	有害物质或元素					
	铅 (Pb)	汞 (Hg)	镉 (Cd)	六价铬 (Cr(VI))	多溴联苯 (PBB)	多溴二苯醚 (PBDE)
	≤0.1%	≤0.1%	≤0.01%	≤0.1%	≤0.1%	≤0.1%
引线框	○	○	○	○	○	○
塑封树脂	○	○	○	○	○	○
管 芯	○	○	○	○	○	○
内引线	○	○	○	○	○	○
焊 料	×	○	○	○	○	○
说 明	○：表示该元素的含量在 SJ/T11363-2006 标准的限量要求以下。 ×：表示该元素的含量超出 SJ/T11363-2006 标准的限量要求。 目前产品的焊料中含有铅 (Pb) 成分，但属于欧盟 RoHS 指令豁免范围。					

绝对最大额定值 **Absolute Ratings** ($T_c=25^{\circ}\text{C}$)

项 目 Parameter	符 号 Symbol	数 值 Value	单位 Unit
最高集电极—发射极直流电压 Collector-Emmitter Voltage	V_{ces}	1200	V
最高栅极发射极电压 Gate-Emmitter Voltage	V_{GES}	± 30	V
连续集电极电流 Collector Current-continuous	I_C $T_C=25^{\circ}\text{C}$	100	A
	I_C $T_C=100^{\circ}\text{C}$	50	A
最大脉冲集电极极电流（注 1） Collector Current – pulse （note 1）	I_{CM}	150	A
二极管正向电流 Diode Continuous Forward Current	I_F $T_C=100^{\circ}\text{C}$	50	A
二极管最大正向电流 Diode Maximum Forward Current (Note 1)	I_{FM}	150	A
短路时间 Short Circuit Withstand Time ($T_J \leq 150^{\circ}\text{C}$)	t_{sc}	10	μs
耗散功率 Power Dissipation	P_D $T_C=25^{\circ}\text{C}$	320	W
	P_D $T_C=100^{\circ}\text{C}$	130	W
最高结温 Operating Junction Temperature	T_J	$-55 \sim +150$	$^{\circ}\text{C}$
存储温度 Storage Temperature Range	T_{STG}	$-55 \sim +150$	$^{\circ}\text{C}$

热特性 **Electrical Characteristics**

项 目 Parameter	符 号 Symbol	数 值 Value	单位 Unit
IGBT结到管壳的热阻 Thermal Resistance, Junction to case for IGBT	$R_{th\ j-c}$	0.24	$^{\circ}\text{C}/\text{W}$
FRD结到管壳的热阻 Thermal Resistance, Junction to case for Diode	$R_{th\ j-c}$	0.5	$^{\circ}\text{C}/\text{W}$
结到环境的热阻 Thermal Resistance, Junction to Ambient	$R_{th\ j-a}$	25	$^{\circ}\text{C}/\text{W}$

IGBT电特性 Electrical Characteristics of IGBT($T_c=25^{\circ}\text{C}$ unless otherwise noted)

项 目 Parameter	符 号 Symbol	测试条件 Tests conditions	最小 Min	典型 Typ	最大 Max	单位 Units
集电极-发射极击穿电压 Collector-Emitter Breakdown Voltage	BV_{CES}	$V_{GE}=0V, I_C=250\mu A$	1200	-	-	V
零栅压下集电极漏电流 Collector-Emitter Leakage Current	I_{CES}	$V_{CE}=1200V, V_{GE}=0V$	-	-	250	μA
正向栅极体漏电流 Gate Leakage Current	I_{GES}	$V_{GE}=\pm 30V, V_{CE}=0V$	-	-	± 100	nA
阈值电压 Gate Threshold Voltage	$V_{GE(th)}$	$V_{GE}=V_{CE}, I_C=250\mu A$	4.5	-	6.0	V
饱和压降 Collector-Emmitter saturation Voltage	$V_{CE(sat)}$	$V_{GE}=15V, I_C=50A$ $T_c=25^{\circ}\text{C}$		2.1	2.6	
		$T_c=125^{\circ}\text{C}$		2.6		V
		$T_c=150^{\circ}\text{C}$		2.7		V
栅极电荷总量 Total Gate Charge	Q_g	$V_{CC}=960V$	-	340	-	nC
栅极-反射极 Gate to emitter charge	Q_{ge}	$V_{GE}=15V$	-	102	-	nC
栅极-集电极 Gate to collector charge	Q_{gc}	$I_C=50A$	-	170	-	nC
开启延迟时间 Turn-On delay time	$t_{d(on)}$	$V_{CC}=600V$ $V_{GE}=15V$ $I_C=50A$ $R_G=15\Omega$ Inductive Load $T_c=25^{\circ}\text{C}$	-	49	-	ns
上升时间 Turn-On rise time	t_r		-	95	-	ns
关断延迟时间 Turn-Off delay time	$t_{d(off)}$		-	630	-	ns
下降时间 Turn-Off Fall time	t_f		-	55	-	ns
开通损耗 Turn-On energy	E_{on}		-	3.42	-	mJ
关断损耗 Turn-off energy	E_{off}		-	3.16	-	mJ
总开关损耗 Total switching energy	E_{tot}		-	6.58	-	mJ
输入电容 Input capacitance	C_{ies}	$V_{CE}=25V$ $V_{GE}=0V$ $f=1\text{MHz}$	-	2834	-	pF
输出电容 Output capacitance	C_{oes}		-	360	-	pF
反向传输电容 Reverse transfer capacitance	C_{res}		-	218	-	pF

二极管电特性 Electrical Characteristics of Diode ($T_c=25^{\circ}\text{C}$ unless otherwise noted)

正向压降 Diode Forward Voltage	V_F	$I_F=50A$	-	1.84	3.5	V
反向恢复时间 Diode Reverse Recovery Time	t_{rr}	$V_{CE}=600V$ $I_F=50A$ $dI_F/dt=200A/\mu s$	-	292	-	ns
反向恢复电流 Diode peak Reverse Recovery Current	I_{rr}		-	23.7		A
反向恢复电荷 Diode Reverse Recovery Charge	Q_{rr}			2878		nC

Note1: Repetitive rating, pulse width limited by maximum junction temperature

特征曲线 ELECTRICAL CHARACTERISTICS (curves)

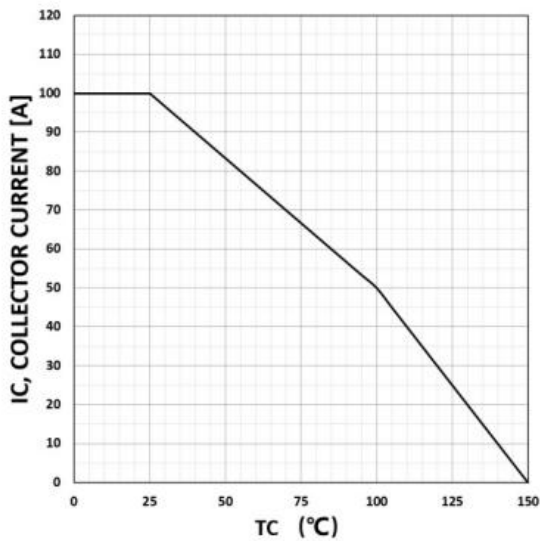


Figure 1. Maximum DC collector current
VS. case temperature

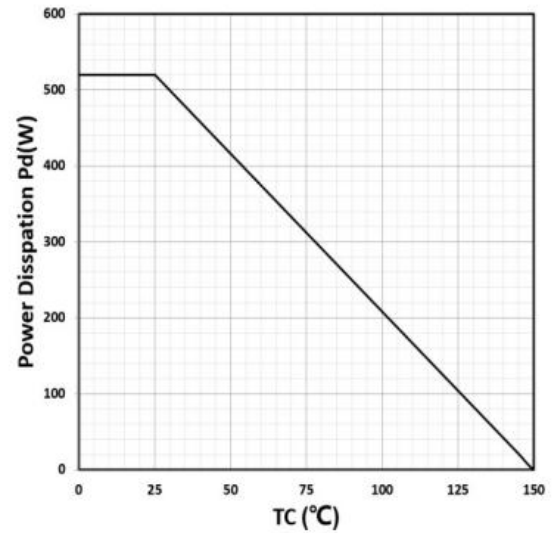


Figure 2. Power dissipation VS. case temperature

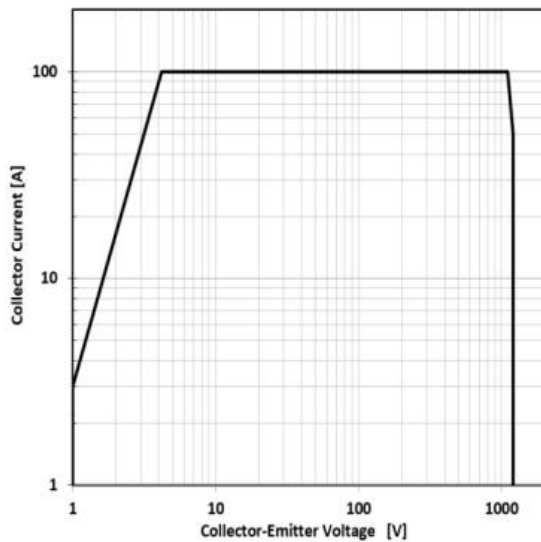


Figure 3. Reverse bias SOA, $T_j=125^{\circ}\text{C}$, $V_{ge}=15\text{V}$

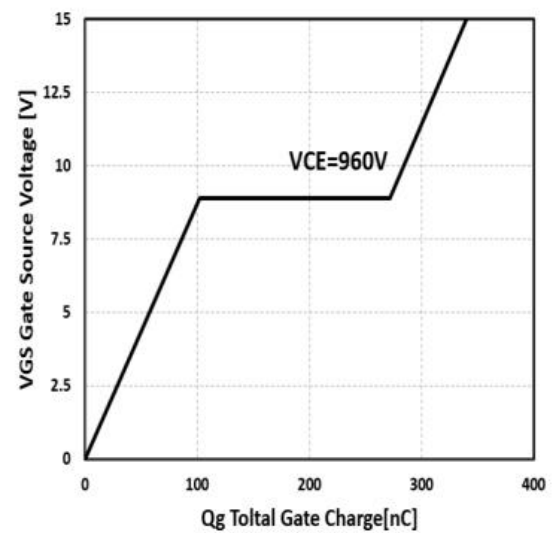


Figure 4. Typical gate charge VS. V_{GE} , $I_C=50\text{A}$

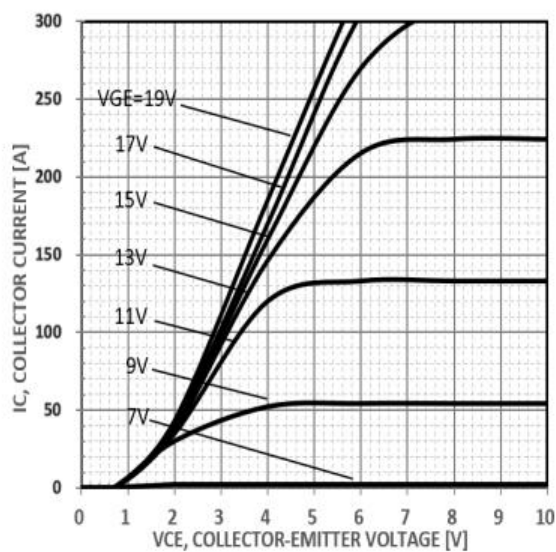


Figure 5. Typical output characteristics
 $t_p = 300\mu\text{s}$ $T_c = 25^\circ\text{C}$

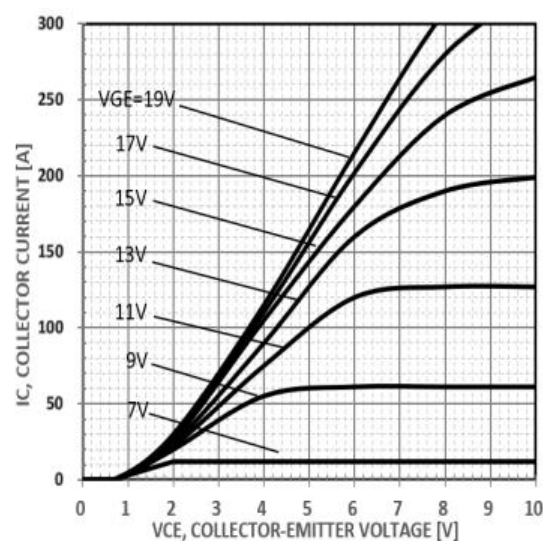


Figure 6. Typical output characteristics
 $t_p = 300\mu\text{s}$ $T_c = 150^\circ\text{C}$

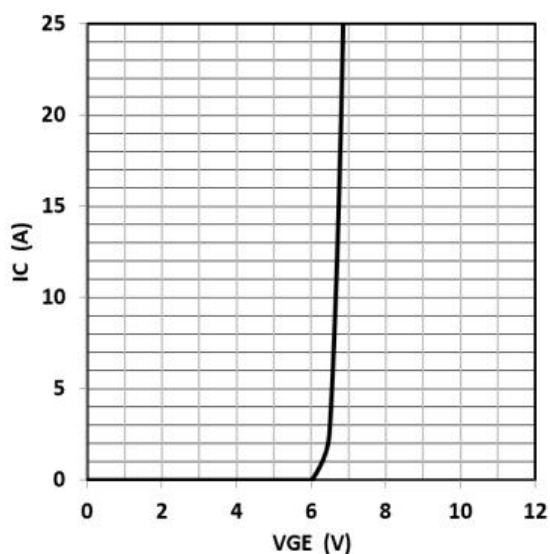


Figure 7. Typical gate threshold voltage

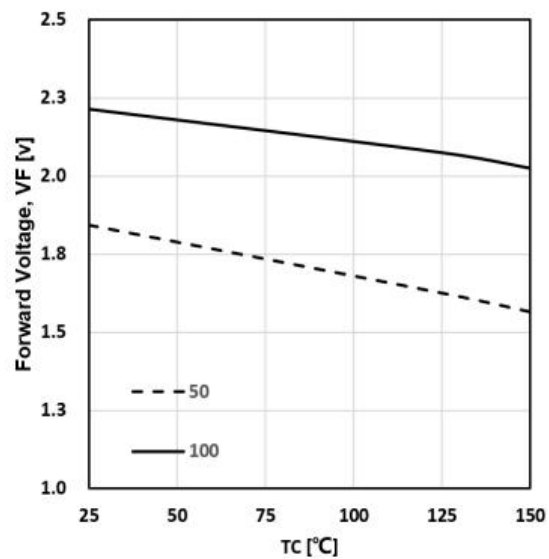


Figure 8. Typical forward voltage vs T_c

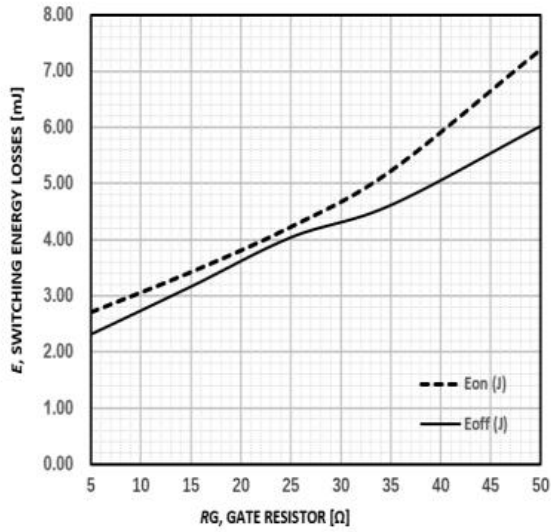


Figure 9. Typical energy loss VS. R_g , $T_C=25^\circ\text{C}$,
 $V_{CE}=600\text{V}$, $V_{GE}=15\text{V}$, $I_C=50\text{A}$

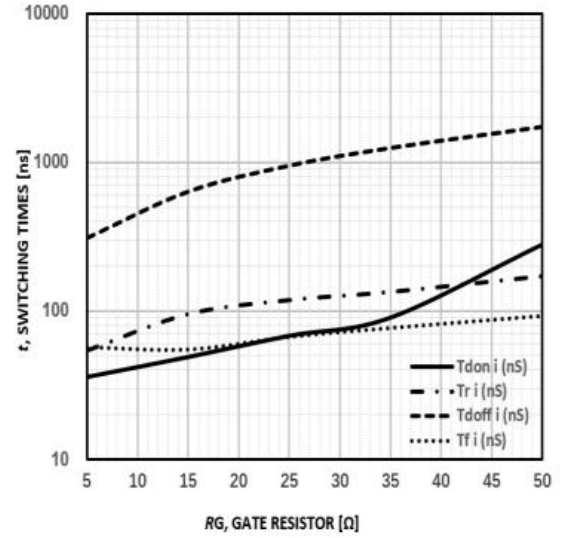


Figure 10. Typical switching time VS. R_g , $T_C=25^\circ\text{C}$,
 $V_{CE}=600\text{V}$, $V_{GE}=15\text{V}$, $I_C=50\text{A}$

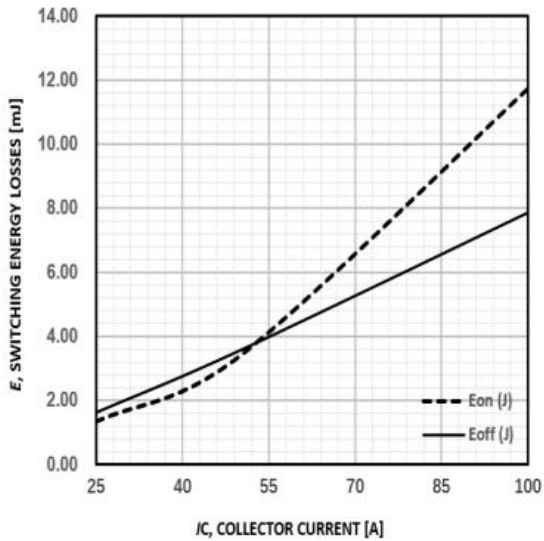


Figure 11. Typical energy loss VS. I_C , $T_C=25^\circ\text{C}$,
 $T_C=25^\circ\text{C}$, $V_{CE}=600\text{V}$, $V_{GE}=15\text{V}$, $R_G=15\Omega$

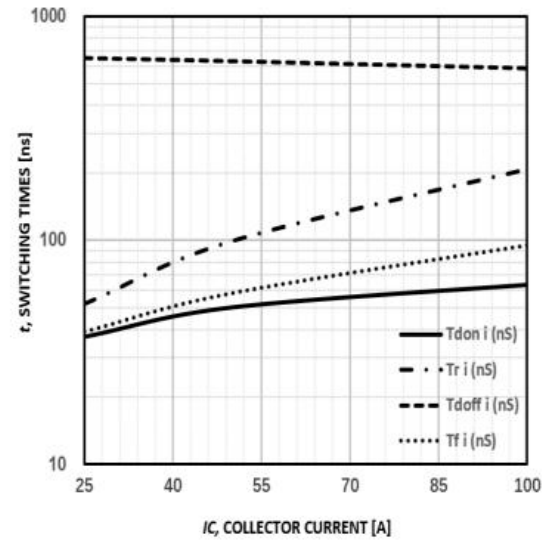


Figure 12. Typical switching time VS. I_C ,
 $V_{CE}=600\text{V}$, $V_{GE}=15\text{V}$, $R_G=15\Omega$

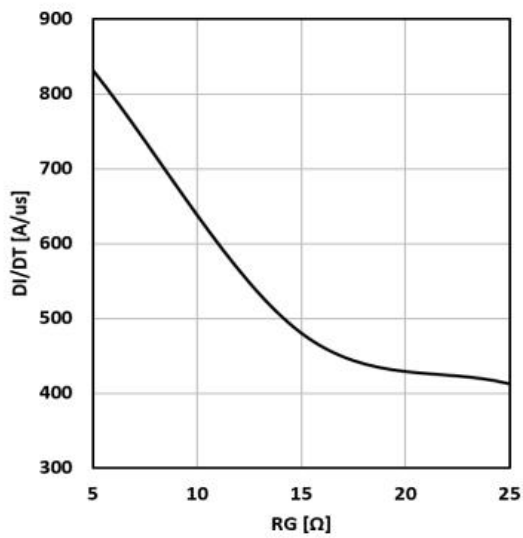


Figure 13. Typical diode di/dt vs r_g $T_c=25^\circ\text{C}$
 $V_{CE}=600\text{V}$ $V_{GE}=15\text{V}$ $I_F=50\text{A}$

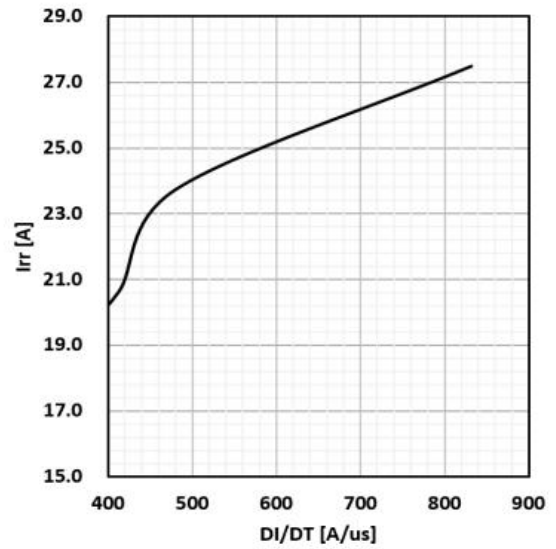


Figure 14. Typical diode i_{rr} vs di/dt $T_c=25^\circ\text{C}$
 $V_{CE}=600\text{V}$ $V_{GE}=15\text{V}$ $I_F=50\text{A}$

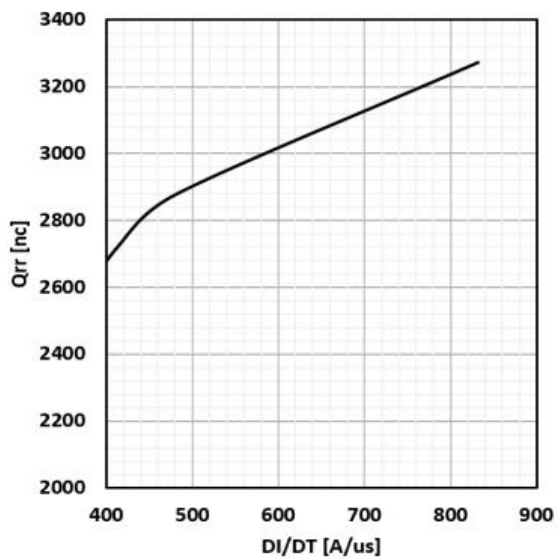


Figure 15. Typical diode Q_{rr} vs di/dt $T_c=25^\circ\text{C}$
 $V_{CE}=600\text{V}$ $V_{GE}=15\text{V}$ $I_F=50\text{A}$

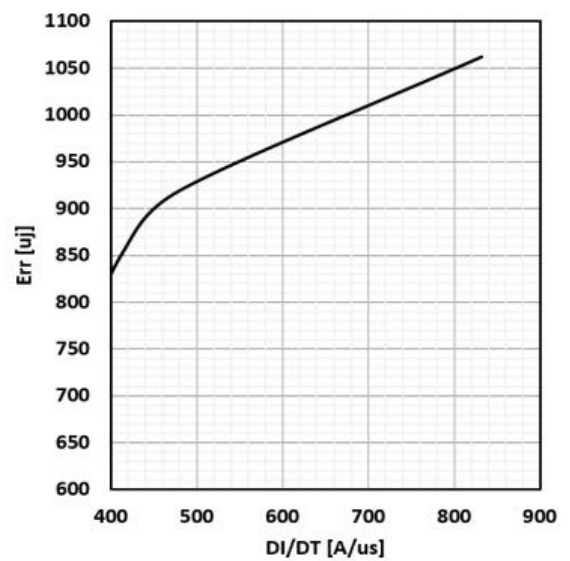


Figure 16. Typical diode E_{rr} vs di/dt $T_c=25^\circ\text{C}$
 $V_{CC}=600\text{V}$ $V_{GE}=15\text{V}$ $I_F=50\text{A}$

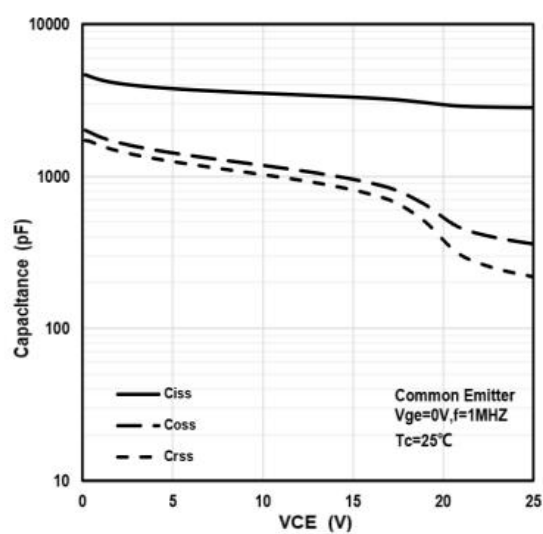


Figure17. Typical capacitance VS. VCE,
VGE=0V, f=1MHz


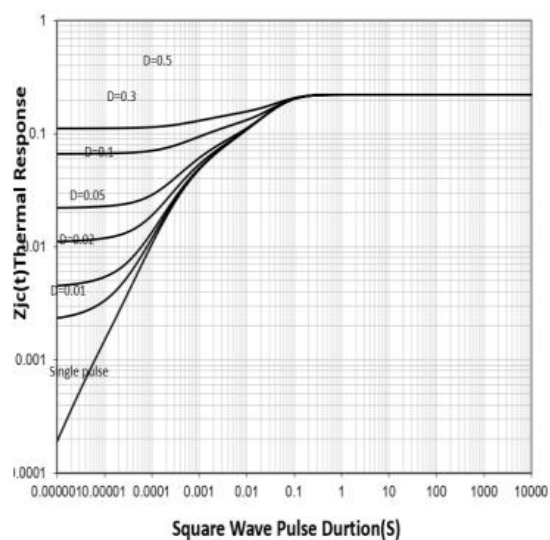


Figure18. normalized transient thermal impedance,
junction-to-case

外形尺寸 PACKAGE MECHANICAL DATA

TO-264

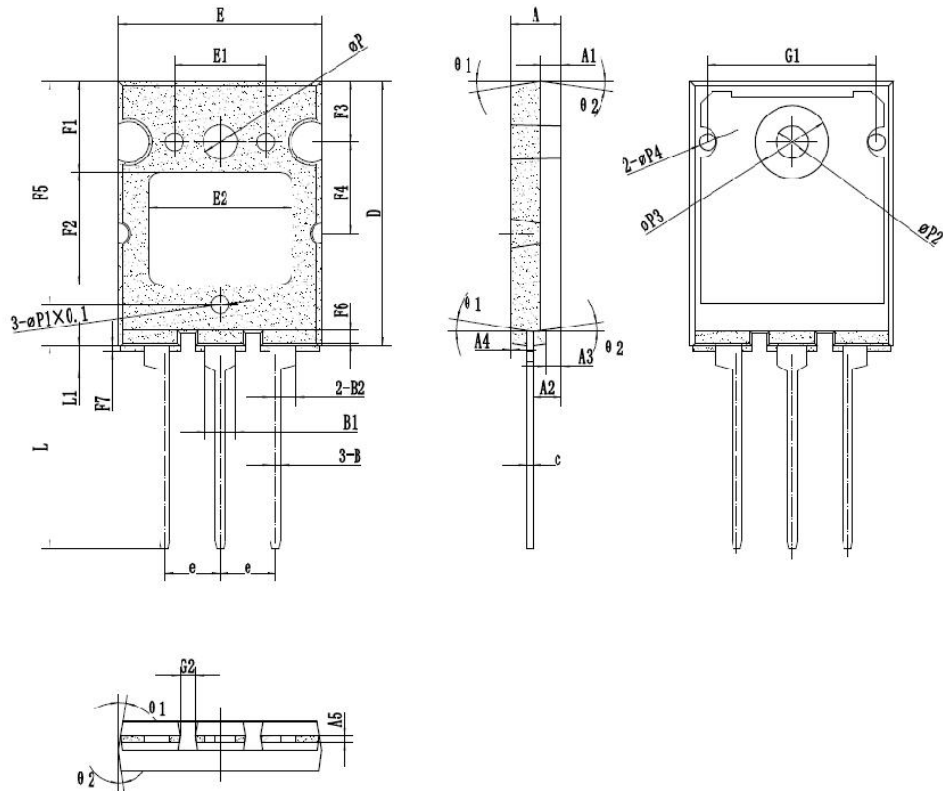

COMMON DIMENSIONS			
SYMBOL	MM		
	MIN	NOM	MAX
A	4.90	5.00	5.10
A1	1.90	2.00	2.10
A2	2.70	2.80	2.90
A3	1.50 REF		
A4	0.15 REF		
A5	0.40	0.60	0.80
B	0.90	1.00	1.10
B1	3.05	3.15	3.25
B2	2.50	2.65	2.75
C	0.50	0.60	0.70
D	25.80	26.00	26.20
e	ø.4ø BSC		
E	19.80	20.00	20.20
E1	8.90	9.00	9.10
E2	14.00 REF		
F1	9.00 REF		
F2	11.00 REF		
F3	5.80	6.00	6.20
F4	8.80	9.00	9.20
F5	22.00 REF		
F6	1.45 REF		
F7	0.00	0.60	0.80
G1	16.50	16.60	16.70
G2	1.40	1.50	1.60
L	19.80	20.10	20.40
L1	2.40	2.50	2.60
øP	3.30	3.40	3.50
øP1	1.70	1.80	1.90
øP2	3.10	3.20	3.30
øP3	7.10	7.20	7.30
øP4	1.55	1.65	1.75
θ 1	7°	9°	11°
θ 2	5°	8°	10°